

ADNOC LUBRICANTS

One of world's premier producers of high performance automotive and industrial lubricants.



We are proud to be a globally expanding company, and our presence in **43 countries** highlights the success of our growth. We continue to strive for excellence, and as we expand our reach across the world, we remain committed to providing quality products and services.



MAJOR OEM APPROVED PRODUCTS



Each and every products are tested in our **ISO-17025** accredited testing laboratory



ADNOC VOYAGER PX GREEN	0W-20	Fully synthetic, Plant Based Base Oil, Carbon Neutral Engine Oil. API SP/SN+ /SN/Resource Conserving; ILSAC GF-6A; Chrysler MS-6395; Ford WSS-M2C962-A1; Ford WSS-M2C947-A/B1
ADNOC E-BRAKE FLUID DOT 5.1		For EVs/Hybrid and high-performance vehicles. FMVSS 116 DOT 3/DOT 4/DOT 5.1; SAE J1703/SAE J1704; ISO 4925-Class 3/4/5, 1/6/71
ADNOC E-COOL LL	50%	Multipurpose cooling fluid for Hybrid (HEV/PHEV) and Electrical (BEV) Vehicles that use indirect cooling systems as well as Heavy/Light Duty Diesel Engines and Petrol/Gasoline engines. Specifications: TESLA, AS 2108-2004, ASTM D3306, ASTM D4985, SAE J1034, AFONOR NF R-15-601, ONORM V 5123, CUNA NC 956-16, JUS K 2234-2006, SANS 1251-2005, China GB 29743-2013 and BS 6580:2010, BMW GS 94000, German Army TL 6890-003811; Mercedes Benz 326.0; Deutz DQC CA-14; Jentbacher TA-Nr. 1000-0201; Liebherr LH-00 COL3A; MAN 324 NF; MTU MTL 5048; Opel/GM B 040 0240; Porsche for 924, 928, 944, 968; Saab 6901599; VW/Audi/Seat/Skoda TL 774-C




ADNOC VOYAGER STAR PLUS ECO	0W-20, 0W-30, 5W-20, 5W-30, 10W-30	Fully Synthetic, API SP/RC/SN+ approved; GM dexos1 Gen3 approved; ILSACF GF-6A approved; Chrysler; Ford
ADNOC VOYAGER STAR PLUS HB	0W-16	Fully Synthetic for Hybrid Cars; API SP/RC approved; ILSAC GF-6B approved
ADNOC VOYAGER STAR	5W-30, 10W-30, 10W-40, 15W-40, 20W-50	API SP/SN+ approved
ADNOC VOYAGER BLUE	5W-20, 5W-30, 5W-40, 5W-50, 10W-60	Fully Synthetic. API SN approved. Petrol and Light Duty Diesel engines, DPF compatible. 5W-20: ACEA C5; ILSAC GF-5; Jaguar Land Rover ST-JLR 03.5004; Ford WSS-M2C948-B 5W-30: ACEA C3; MB approval 229.31/229.51; Renault RN0700/0710 5W-40: ACEA C3; MB approval 229.31/229.51; Porsche A40; Renault RN0700/0710; VW 505 00/505 01 5W-50: ACEA C3 10W-60: ACEA C3; MB 229.31/229.51; VW 505 00
ADNOC VOYAGER GOLD	0W-40, 5W-30, 5W-40	Fully Synthetic. API SN approved. Petrol and Light Duty Diesel engines. 5W-30: ACEA A3/B4; API SN; BMW Long Life-01; MB-Approval 229.5; Porsche A40; Renault RN0700/0710; VW 502 00/VW 505 00 0W-40/5W-40: ACEA A3/B4; API SN; BMW Long Life 01; MB-Approval 229.5; Porsche A40; Renault RN0700/0710; VW 502 00/VW 505 00
ADNOC VOYAGER GOLD RL	5W-20, 5W-30	Fully Synthetic. Petrol and Light Duty Diesel engines. 5W-20: ACEA A1/B1; Ford WSS-M2C925-B; Jaguar/Land Rover STJLR.03.5004 5W-30: ACEA A5/B5; API SL; Ford WSS-M2C913-C/D; Jaguar/Land Rover STJLR.03.5003; Renault RN0700
ADNOC VOYAGER GOLD 8900	0W-20	Fully Synthetic. Petrol and Light Duty Diesel engines. ACEA C5; VW 508 00/509 00; Porsche C20; Ford WSS-M2C956-A1
ADNOC VOYAGER GOLD 4700	5W-30	Fully Synthetic. Petrol and Light Duty Diesel engines. ACEA C3; API SP approved; BMW Longlife-04; MB-Approval 229.31/229.51/229.52; Porsche C30; VW 504 00/507 00 approved
ADNOC VOYAGER SILVER PLUS ECO	0W-20, 0W 30, 5W-20, 5W-30, 10W-30	Fully Synthetic. API SN Plus approved; ILSAC GF-5; GM dexos1 Gen3 (5W-30 and 0W-20 only); Chrysler MS-6395; Ford
ADNOC VOYAGER SILVER	10W-30, 10W-40,	Semi-synthetic. Petrol and Light Duty Diesel engines. ACEA A3/B4; API SN approved; MB 229.1/229.3; Renault RN 0700/0710; VW 501 01/VW 505 00
ADNOC VOYAGER BRONZE SPECIAL	10W-30, 15W-40	Semi-synthetic. API SL approved
ADNOC VOYAGER BRONZE	20W-50	API SL approved
ADNOC VOYAGER SJ	40, 20W-50	API SJ approved



ADNOC GEAR OIL SX	75W-80, 75W-90, 75W-140	Fully Synthetic. API GL-5; MIL-L-2105D
ADNOC GEAR OIL GX LS (Limited Slip)	90, 80W-90	Limited Slip Differential Oil. API GL-5
ADNOC GEAR OIL GX	80W, 90, 140, 80W-90, 85W-90, 85W-140	API GL-5
ADNOC GEAR OIL GP	80W, 90, 140, 80W-90, 85W-90, 85W-140	API GL-4
ADNOC GEAR OIL GXM	85W-90	MB 235.0; MAN 342 M-1; Voith 3.325-339; Volvo 97310; ZF TE ML 05C+/07A/12C+/16C/16E+/17B/19B/21A/21C+
ADNOC GEAR OIL GPM	85W-90	MB 235.1; MAN 341 E-1/2-2; ZF TE ML 02B/16A/17A/19C
ADNOC GEAR OIL GX HD	80W-90	API GL-5, API MT-1, DFS93K219.02, MACK GO-J, MAN 342 M-3 MB 235.20, SAE J2360, Scania STO 1.0 ZF TE-ML-04G/05A/07A/12B.E.L.M.V/16B.C.D/17B/19B.C/21A
ADNOC HD TRANS	10W, 30, 40, 50	API CF; Caterpillar TO-2
ADNOC VOYAGER TRANSAXLE WB 201		Volvo WB 102 (97304)



ADNOC VOYAGER HD LONG DRAIN	10W-40	Fully Synthetic. ODI up to 100,000-120,000km subject to certain conditions. ACEA E4/E7; DAF Extended Drain (Euro III and IV engines); Deutz DQC III-10; Mack EO-N (approved); MAN M 3277; MB Approval 228.5 (approved); MTU Type 3; Renault VI RLD-2 (approved); Scania LDF-3 (approved); Volvo VDS-3 (approved)
ADNOC VOYAGER SUPER PLUS HD	10W-30, 10W-40, 15W-40	Semi-synthetic. ACEA E9/E7; API CK-4/SN approved; Cat ECF-3; Cummins CES 20086 (10W-40 approved); DFS 93K222; Deutz DQC III-18 LA; JASO DH-2; Mack EO-S 4.5 approved; MAN M 3775; MB-Approval 228.31; MTU Type 2.1; Renault VI RLD-3 approved; Volvo VDS-4.5 approved
ADNOC VOYAGER ULTRA	15W-40	Semi-synthetic. ACEA E9; API CJ-4/SN approved; Cat ECF-3; Cummins CES 20081 Detroit Diesel DDC 93K218; Deutz DQC III-18 LA; Mack EO-O PP; MAN M 3575; MB-Approval 228.31; MTU Type 2.1; Renault VI RLD-3; Volvo VDS-4
ADNOC VOYAGER PLUS HD	10W-30, 10W-40, 15W-40	Semi-synthetic. ACEA E7; API CH-4 Plus/SL; Cat ECF-2; Cummins CES 20078 approved; Detroit Diesel DDC 93K214; Deutz DQC III-18; Global DHD-1; JASO DH-1; Mack EO-N approved; MAN M 3275; MB-Approval 228.3; MTU Type 2; Renault VI RLD-2 approved; Volvo VDS-3
ADNOC VOYAGER ULTRA SEMI-SYN	10W-40	Semi-synthetic. ACEA E4/E7; API CL-4; Cummins CES 20078; Deutz DQC IV-18; Mack EO-N; MAN M 3377/3477; MB-Approval 228.5; MTU Type 3.1; Renault VI RLD-2; Volvo VDS-3
ADNOC VOYAGER PLUS	10W-30, 10W-40, 15W-40, 20W-50	Semi-synthetic. ACEA E7; API CH-4/SL approved; CAT ECF-1-a; Cummins CES 20078 approved; Detroit Diesel DDC 93K215; Deutz DQC III-18 approved; Global DHD-1; JASO DH-1; Mack EO-N approved; MAN M 3275; MB-Approval 228.3; MTU Type 2; Renault VI RLD-2 approved; Volvo VDS-3 approved
ADNOC VOYAGER PLUS	40, 50	API CI-4/SL
ADNOC VOYAGER PLUS 50, 70	25W-50, 25W-70	API CI-4; 11 TBN.
ADNOC VOYAGER HPSD PLUS	15W-40, 20W-50,	Semi-synthetic. API CH-4/SJ
ADNOC VOYAGER HPSD PLUS	10W, 30, 40, 50, 25W-50, 25W-70	API CH-4; 10 TBN.
ADNOC VOYAGER HPSD	10W-30, 15W-40,	API CG-4; 10 TBN.
ADNOC VOYAGER HD CF-4	15W-40, 20W-50	API CF-4
ADNOC VOYAGER HD	10W, 30, 40, 50, 70	API CF

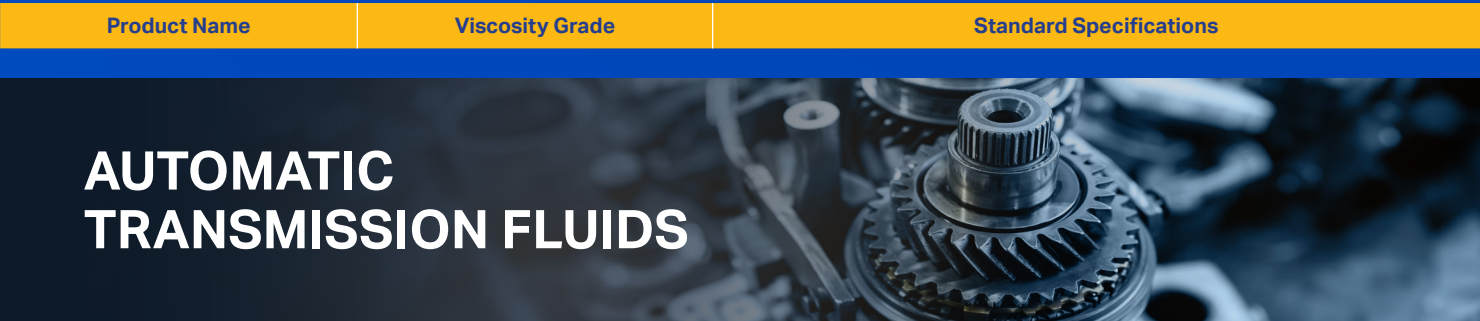

ADNOC ATF UNIVERSAL	Automatic Transmission Fluid	Fully Synthetic. Allison C-4, TES 389 and TES 295; Chrysler ATF+4; Ford Mercon® V; GM Dexron® III-H; JASO 1A; Ford Mercon® LV; GM Dexron®-VI; Hyundai SP-IV; Mazda FZ; MB 236.14/236.15/236.17; Nissan Matic S; ZF Lifeguardfluid6/6+/7/8; Toyota Type WS
ADNOC CVT FLUID	Continuously Variable Transmission (CVT) Fluid	Fully Synthetic. Daihatsu AMMIX CVT, CVT F DTC, CVTF-D FE; Dodge/Jeep NS-2, CVTF+4; Ford CVT 30, CVT 23; GM/Saturn DE-X-CVT; Honda HCF2; Hyundai/Kia SP CVT 1; Mazda CVTF 3320; Mercedes Benz 236.20; Mitsubishi CVT-J1, CVT-J4*; Nissan NS-1, NS-2, NS-2V, NS-3; Subaru Lineartronic CVTFCVTF II, HT CVTF, CV-30, e-CFTV; Suzuki TC, NS-2, VTF 3320, CVT Green 1/2*/3; Toyota TC, FE*; VW/Audi TL 52180; G 052 180 (-A2); G 052 516 A2 *OEM genuine CVTF is recommended during transmission warranty period.
ADNOC DCT FLUID	Dual Clutch Transmission Fluid	Dual Clutch Transmission Fluid
ADNOC AUTOMATIC TRANSMISSION FLUID DEXRON III H	Automatic Transmission Fluid	Allison C-4; GM Dexron® III-H; Ford Mercon®
ADNOC AUTOMATIC TRANSMISSION FLUID DII	Automatic Transmission Fluid	GM Dexron® II-H; GM Type 'A' Suffix 'A' (TASA)
ADNOC TRANSMISSION OIL T4	10W, 30, 40, 50, 60	API CF; Allison C-4 (SAE 10W, 30); Caterpillar TO-4; Komatsu KES 07.868.1; ZF TE-ML-03C (SAE 10W, 30); ZF TE-ML-07F (SAE 30)



ADNOC VOYAGER SYN GVEO	10W-30	Fully Synthetic Gas Vehicle Engine Oil (GVEO). API SN/RC approved; ILSAC GF-5
------------------------	--------	---



ADNOC TORQUE FLUID 56	10W-30	AGCO Power Fluid 821XL; Allison C-4; API GL-4; Case Corporation J1C-143, J1C-145, MS 1206/MS 1207/ MS 1209, Case New Holland CNH MAT3505/3525; Caterpillar TO-2
ADNOC TORQUE FLUID N45	ISO VG 32	Ford New Holland ESN-M20134-DIFMHA-2-C-201; John Deere J20C; Kubota UDT; Massey Ferguson CMS M1135/M1141/M1143/M1145; Volvo VCE WB101 (87303); ZF TE-ML-03E/05F/08K/17E
ADNOC SUPER TRACTOR UNIVERSAL OIL	15W-40, 20W-40	Voith Turbo Specifications 3.90-8e 2/97; ISO 6743-4 HM; DIN 51502 LHPD; DIN 51517-3 CLP
		Allison C-4; API CG-4; API GL-4; Caterpillar TO-2; Ford ESN-M2C-159B3/C3 (SAE 20W-40); FNH 82009203 (SAE 20W-40); John Deere J27 (SAE 15W-40); Massey Ferguson CMS M1144; Sperry Vickers/ Eaton P-286-S/M-2350-S; ZF TE-ML 06B/07B; Gonestock Pump Test (ASTM D7043/ISO 20763)

Product Name		Viscosity Grade	Standard Specifications
 AUTOMOTIVE COOLANTS			
ADNOC AUTOCOOL LL (LONG LIFE) GREEN		33%, 40%, 50%, 100%	L ong Life (LL), Organic Acid Technology (OAT) based coolant. 650,000/250,000 km; 8000 h; 5 years range. ASTM D6210/D3306; BS 6580; Cat; Cummins; DAF 74002; Detroit Diesel; Deutz; MB 325.3/326.3; Komatsu 07.892; Liebherr MDI-36-130; MAN 324 SNF; MTU MTL 5048; Volvo; Wartsilä DLP 799861; Ford WSS-M97B44D; Porsche; GM; VW/Audi TL 774F; Hyundai/Kia.
ADNOC AUTOCOOL LL (LONG LIFE) RED			
ADNOC AUTOCOOL LL (LONG LIFE) PINK			
ADNOC AUTOCOOL LL NM RED		50%, 100%	Hybrid, OAT/Nitrite based coolant. Improved protection for wet cylinder liners. ASTM D6210; Caterpillar ELC (EC-1); Cummins 90T8-4; Detroit Diesel 7SE298; Freightliner 48-22880; SAE J1034, J1038; TMC RP329.
ADNOC AUTOCOOL GREEN		33%, 40%, 50%, 100%	Organic Acid Technology (OAT) based coolant. 100,000 km range. ASTM D3306; BS 6580.
ADNOC AUTOCOOL RED			
ADNOC AUTOCOOL BLUE			
ADNOC AUTOCOOL WB GREEN, RED		Ready-to-use	Water-based (Iron-glycol). Prevents corrosion of metals and alloys used in modern engine cooling systems, including aluminum, iron, copper, and solder alloys
ADNOC MOTOCOOL LL RED		50%	Organic Acid Technology (OAT) based coolant. ASTM D3306; BS 6580.
ADNOC MOTOCOOL LL GREEN			

BRAKE FLUID

ADNOC BRAKE FLUID DOT 3		FMVSS 116 DOT 3; SAE J1703
ADNOC BRAKE FLUID DOT 4		FMVSS 116 DOT 4; SAE J1704
ADNOC E-BRAKE FLUID DOT 5.1		FMVSS 116 DOT 3/DOT 4/DOT 5.1; SAE J1703/SAE J1704; ISO 4925-Class 3/4/5.1/6/7

3-WHEELER OIL

ADNOC VOYAGER 3-WHEELER SPECIAL PLUS CP	20W-40, 20W-50	Semi-synthetic, API SL Approved; JASO T 903:2016 MA/MA2
ADNOC VOYAGER 3-WHEELER SPECIAL	40	API SJ; JASO T 903:2016 MA
ADNOC VOYAGER 3-WHEELER	40	API SG

FLUSHING OIL

Disclaimer: This catalogue is intended for reference purposes only and should not be used as a definitive tool for product positioning. Detailed information regarding product performance, application, and nature can be found in the Product Data Sheet. For additional information, please contact your ADNOC sales representative.

ADNOC Distribution reserves the right to change product specifications without prior notice

REV 03
OCT - 24

Product Name		Viscosity Grade	Standard Specifications
2 STROKE OIL - 2T			
ADNOC SUPREME PLUS 2T ENGINE OIL		Fully Synthetic, ester based, environment-friendly, low smoke; API TC; JASO FD; ISO L-EGD	
ADNOC SUPREME 2T ENGINE OIL		Semi-synthetic, low smoke. API TC; JASO FD; ISO L-EGD	

4 STROKE OIL - 4T

DEDICATED MOTORCYCLE OIL		
ADNOC VOYAGER MPX4-P	10W-30, 10W-40, 20W-40, 20W-50	Semi-synthetic. API SP; JASO T 903:2023 MA/MA2
ADNOC VOYAGER MPX4-N	5W-40, 10W-30, 10W-40, 10W-60	Fully Synthetic. API SN; JASO T 903:2016 MA/MA2
ADNOC VOYAGER MPX4-X	15W-50, 20W-50	Semi-synthetic. API SN; JASO T 903:2016 MA/MA2
ADNOC VOYAGER MPX4-L	10W-30, 10W-40, 20W-40, 20W-50	Semi-synthetic. API SL; JASO T 903:2016 MA/MA2
ADNOC VOYAGER MPX4-G	20W-40, 20W-50	API SG
ADNOC VOYAGER MPX4-F	40	API SF
DEDICATED SCOOTER ENGINE OIL		
ADNOC VOYAGER SPX4-N	10W-30; 10W-40; 20W-40	Fully Synthetic. API SN approved; JASO T 903:2016 MB approved
ADNOC VOYAGER SPX4-L	10W-30, 10W-40, 20W-40	Semi-synthetic. API SL approved; JASO T 903:2016 MB approved

AUTOMOTIVE GREASES

ADNOC GREASE PA	NLGI 1, 5, 2	Fully Synthetic (PAO), Lithium Complex Grease. DIN 51825: KPHC 2N-30 (Grease PA 220) DIN 51825: KPHC 1-2N-40 (Grease PA 460)
ADNOC GREASE EP MOLY (LF)	NLGI 2, 3	Molybdenum Di-Sulphide (MoS2) and Extreme Pressure additive loaded grease for heavy-duty equipment loaded bearings lubrication
ADNOC GREASE MP MOLY	NLGI 2, 3	Molybdenum Di-Sulphide (MoS2) based multi-purpose grease
ADNOC GREASE EP	NLGI 1, 2, 3	Extreme Pressure additive loaded grease for heavy-duty equipment loaded bearings lubrication
ADNOC GREASE MP	NLGI 2, 3	Multi - purpose Chassis grease and light duty applications
ADNOC GREASE LX EP	NLGI 2, 3	Lithium Complex, Extreme Pressure additives loaded based grease for long life, high temperature, high loaded bearings lubrication
ADNOC GREASE LX	NLGI 2, 3	Lithium Complex based grease for long life, high temperature bearings lubrications
ADNOC GREASE EM	NLGI 3	Dedicated Electric motor bearing Grease with extra tackiness
ADNOC GREASE CS EP	NLGI 000, 00, 0	Extreme Pressure Additives based grease for Centralized Systems
ADNOC GREASE LI-CA EP	NLGI 2	Lithium-Calcium, Extreme Pressure additives loaded based grease, moderate loaded bearings lubrication

Disclaimer: This catalogue is intended for reference purposes only and should not be used as a definitive tool for product positioning. Detailed information regarding product performance, application, and nature can be found in the Product Data Sheet. For additional information, please contact your ADNOC sales representative.

REV 03
OCT - 24

ABOUT ADNOC GROUP



50,000+ Employees



LARGEST single oil refinery in the Middle East



LARGEST drilling company in the Middle East with **100+** onshore, offshore and well water rigs.



LARGEST gas processing plants with capacity of **8 billion** standard cubic feet per day



LARGEST network of service stations in UAE - **500+** Service Stations, **340+** Convenience Stores



UAE'S most valuable brand
for 4 consecutive years

DRIVE WITH CONFIDENCE

dnocdistribution.ae      Follow Us @adnocdistribution

ADNOC AUTOMOTIVE PRODUCT PORTFOLIO

